

•FRANK•

ColdSwing

Unite flow of traffic with ample insulation and durable construction.

2007 EISA and EPCA Compliant



EXPERIENCE UNIMPEDED TRAFFIC

*All ColdSwing™ Double Acting Doors are hinged to swing in both directions, facilitating **transportation** of goods and personnel.

***Have your hands full?** Users may simply push open ColdSwing™-- regardless of the direction from which they come.

DEFEAT COSTS FROM COOLING LOSS

*Every ColdSwing™ is equipped with at least 3.5" Thick, R25, CFC-free, Foamed-in-place Polyurethane.

*A dual blade gasket runs the full perimeter, prohibiting **air exchange**.

*Both the door and the frame come with a thermal break to impede heat transfer.

OUR DURABILITY EQUALS RELIABILITY

*All ColdSwing™ Panels are equipped with impact plates.

*Each door is encased in 24 Gauge Metal Skins.

*Door edges are **protected** by full radius nose guards.

*Doors come pre-hung to an aluminum extruded frame, at minimum 3/16" thick.



COLDSWING



DOUBLE
COLDSWING

The New **American** Standard
for Cold Storage Doors

Features

Installing a Frank Door **ColdSwing™** is as simple as standing the door up in its frame and fastening it to the wall. The three-piece KD frame is included with its hinges pre-attached.



The **ColdSwing™** is a true cold storage door with a full perimeter, front to back thermal break. There are no external back spines or capping channels that provide a path for thermal conductivity. In addition, dual perimeter gaskets manage air infiltration without hard-to-seal hinge and jamb cutouts. The **ColdSwing™** is an excellent visual and performance match to the look and feel of typical cold storage doors.

The **ColdSwing's** unique spring-loaded hinges allow for the door to be pushed in either direction, facilitating traffic. The door then closes itself, saving energy, time and the attention of the employee.

ColdSwing™ is both available in a variety of standard sizes and can be built to your custom specifications; contact Frank Door to review the best **ColdSwing™** solution for your application today!


Advanced Spring Hinge

Integrated, full wash-down stainless steel and HDPE no-rise hinge requires no adjustments or maintenance.

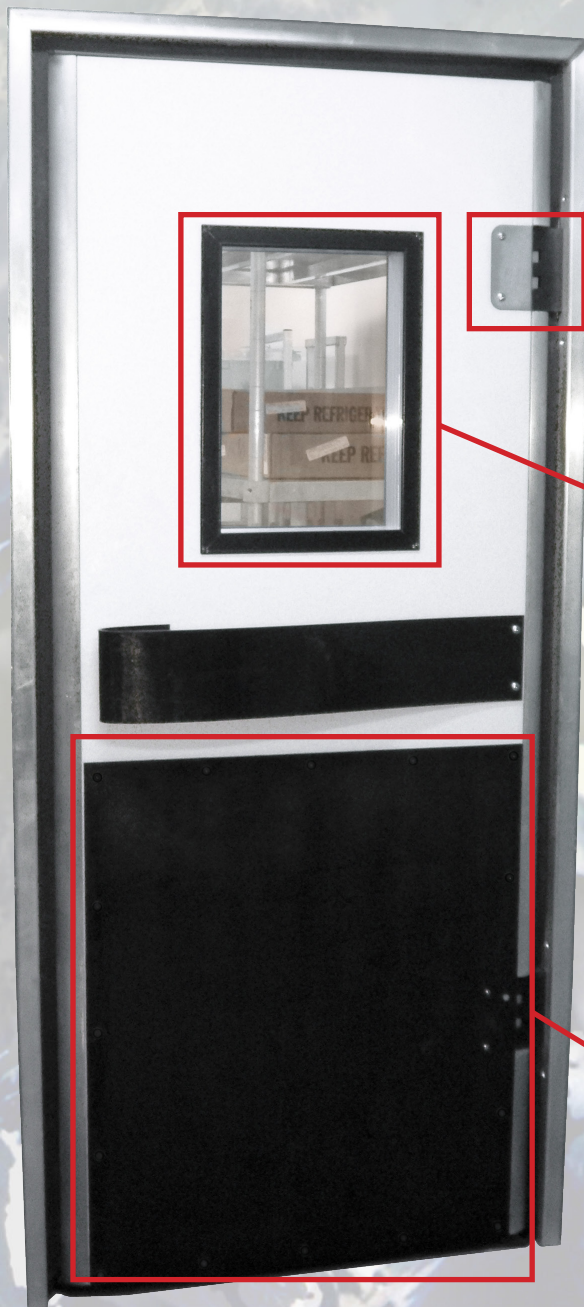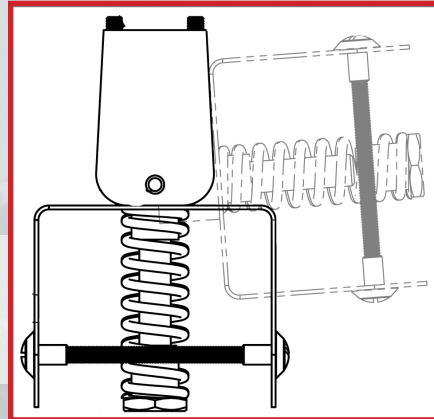

Insulated Window

Sealed, heat reflective, gas-filled tempered window saves cost from energy loss while facilitating safe traffic in and out of the connecting rooms.

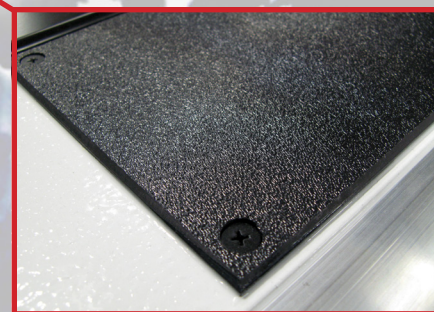

Durable Kickplate

Durable ABS kickplates come standard. A spring bumper is available for further protection.



The Frank Door Company welcomes your call

Hours of Operation: Toll Free: (888) 833-DOOR (3667)

8:00 AM - 5:00 PM (EST) Phone: (252) 223-1112

Monday - Friday Fax: (252) 223-1116

413 Howard Blvd., Newport, North Carolina USA 28570

www.frankdoor.com

Copyright 2013 Frank Door Company